


# SPEARHEAD







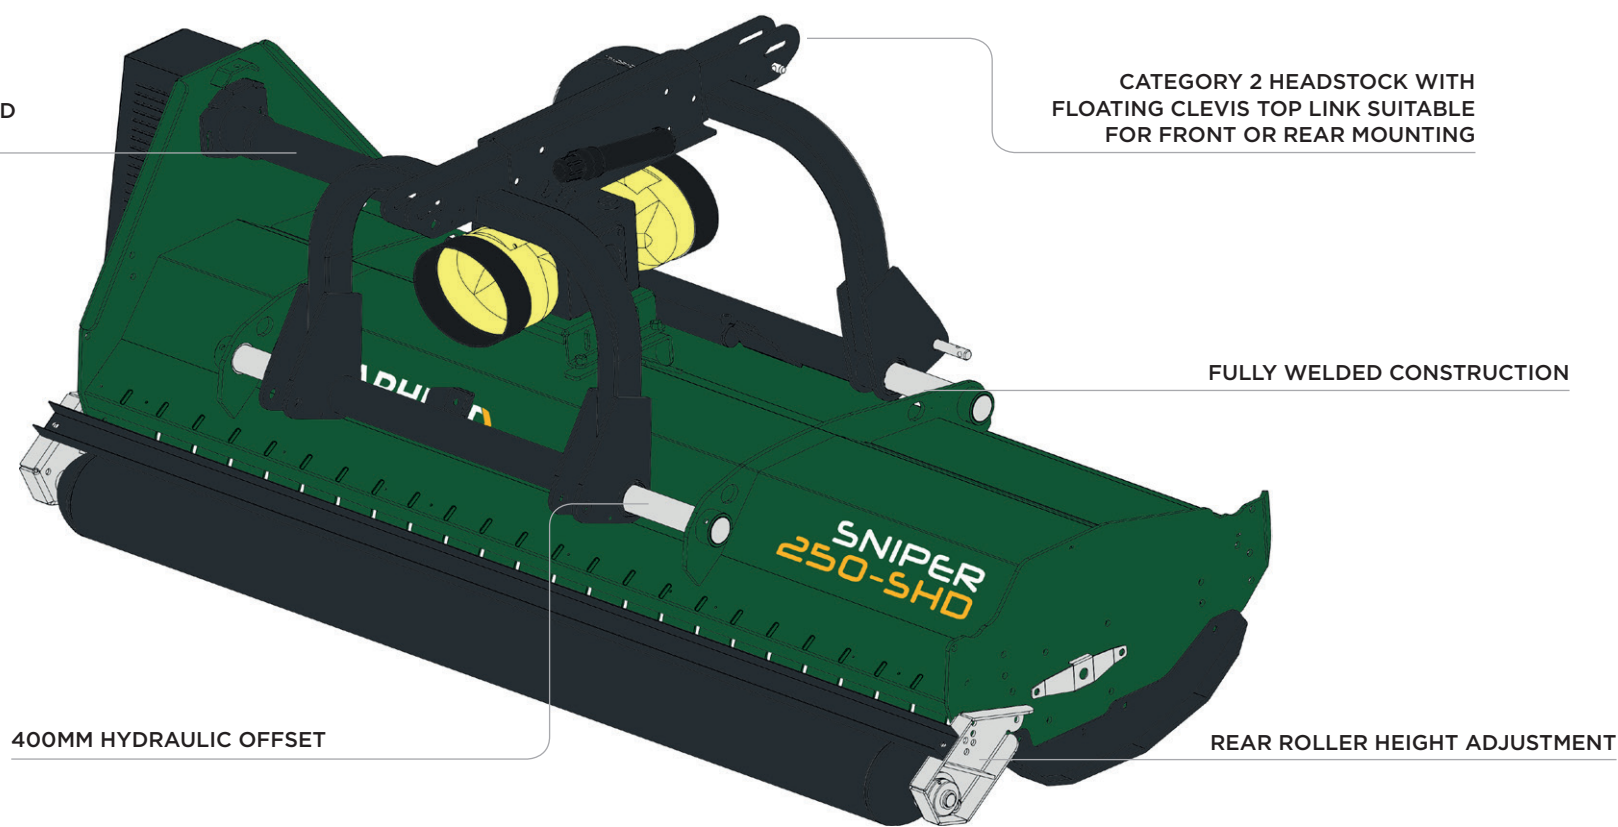

SNIPER SHD






# SNIPER SHD FEATURES



	 TRACTOR HP	 PTO SPEED	 TRANSPORT WIDTH	 3 POINT LINKAGE MOUNTING	 CUTTING WIDTH	 FLAIL TYPE	 NO. OF FLAILS	 CUTTING HEIGHT
SNIPER 250-SHD	90hp (67kW)	540/1000rpm	2.80m (9' 2")	✓	2.50m (8' 2")	Heavy-duty hammer flail	23	25mm - 45mm (1" - 1.8")
SNIPER 280-SHD	100hp (75kW)	540/1000rpm	3.00m (9' 10")	✓	2.80m (9' 2")	Heavy-duty hammer flail	25	25mm - 45mm (1" - 1.8")

# SNIPER SHD — THE CHOICE OF THE PROFESSIONAL

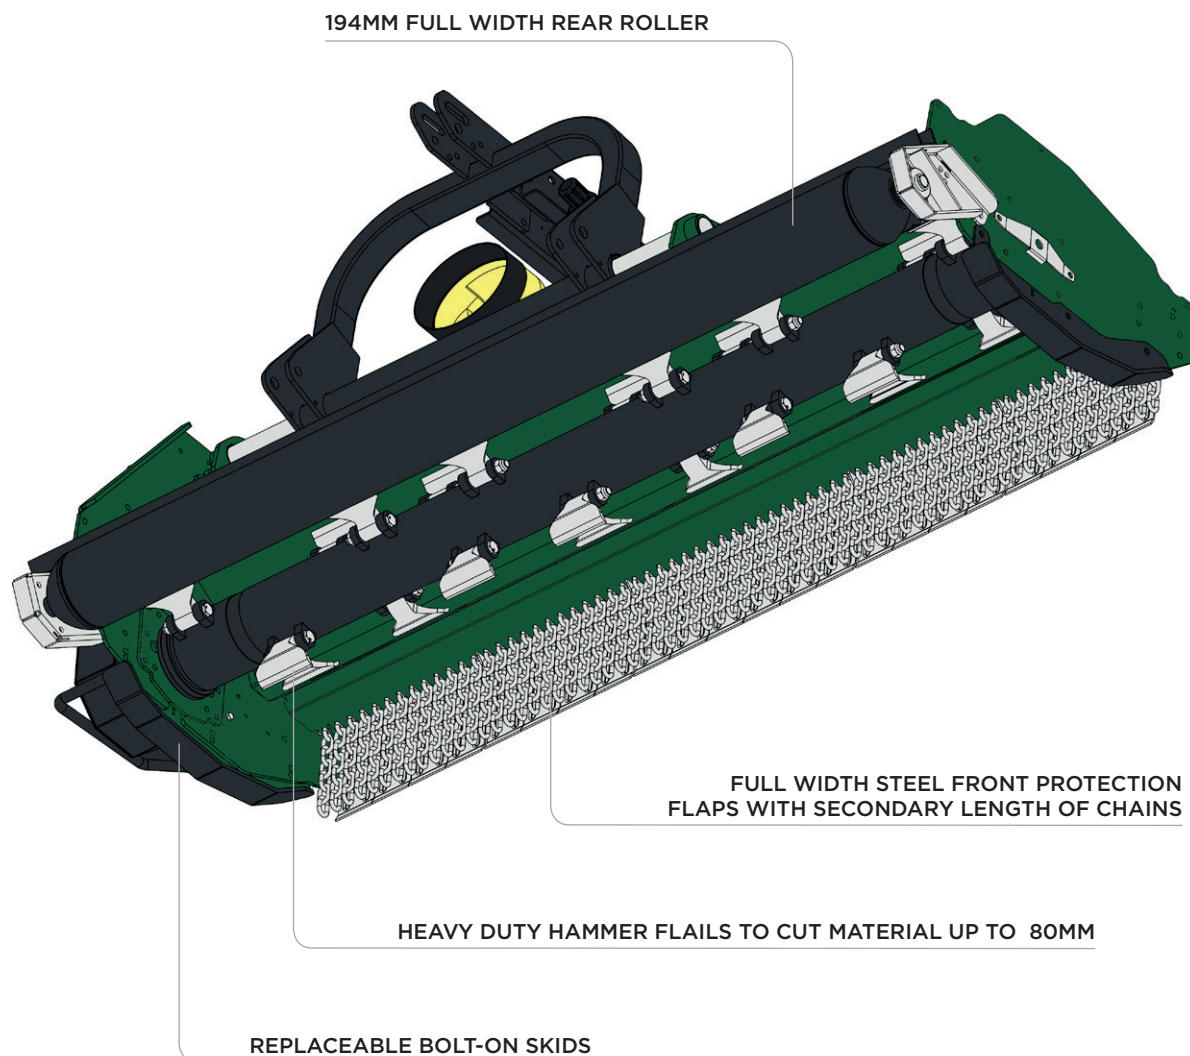

The Sniper SHD flail mower is designed for agricultural and municipal use giving a high quality and consistent cut in material up to 80mm. It is the perfect choice for intense use farmers and professional operators such as contractors and local authorities.

This highly robust machine features heavy duty hammer flails fitted on an electronically balanced rotor mounted on enclosed, self-aligning bearings. Belt drive gives reliable power transmission in challenging conditions and a 194mm full width adjustable, self-cleaning rear roller with scraper will ensure a quality cut and well distributed finish; even in the most intense terrain.

The Sniper SHD range is available in a choice of working widths between 2.5 and 2.8 metres with operating flexibility offered by a 400mm hydraulic side shift that allows work around trees and other obstructions. The machine can also be front or rear mounted thanks to a reversible headstock.

SPECIFICATION	SNIPER 250-SHD	SNIPER 280-SHD
Machine weight	1050kg (2315lbs)	1150kg (2535lbs)
Hitch	Category 2 with floating clevis top link	Category 2 with floating clevis top link
Hitch position	Front and rear mount	Front and rear mount
Cutting width	2.50m (8' 2")	2.80m (9' 2")
Overall width	2.80m (9' 2")	3.00m (9' 6")
Overall length	1.20m (3' 11")	1.20m (3' 11")
Cowl height	540mm (1' 10")	540mm (1' 10")
Cutting height	25mm - 45mm (1" - 1.8")	25mm - 45mm (1" - 1.8")
Cutting capacity	80mm (3.1")	80mm (3.1")
Maximum offset distance (hydraulic)	400mm (1' 4")	400mm (1' 4")
Recommended tractor HP	90hp (67kW)	100hp (75kW)
Power take-off speed	540/1000rpm	540/1000rpm
Gearbox	Cast iron housing with integrated enclosed connecting shaft	Cast iron housing with integrated enclosed connecting shaft
Input shaft	1" 3/8 Z6	1" 3/8 Z6
Gearbox lubricant	EP80-90W or GL-4 / GL-5 oil	EP80-90W or GL-4 / GL-5 oil
Gearbox oil capacity	2.3 litres (4.0 pints)	2.3 litres (4.0 pints)
Cowl construction	All welded construction	All welded construction
Skid construction	Replaceable bolt-on skid	Replaceable bolt-on skid
Flail	Heavy-duty hammer flail	Heavy-duty hammer flail
Flail quantity	23	25
Flail tip speed	50m/s (9842 fpm)	50m/s (9842 fpm)
Rotor diameter	168mm (6.6")	168mm (6.6")
Roller diameter	194mm (7.6")	194mm (7.6")
Number of belts	5	5

# SPEARHEAD

📍 Station Road, Salford Priors, Evesham, Worcestershire, WR11 8SW, England ☎ +44 (0)1789 491860

✉ enquiries@spearheadmachinery.com 📧 spearheadmachinery.com 🐦 f SpearheadWorld



Spearhead  
is a member of the  
  
Alamo Group